




The Plug Locking Mechanism is the same robust style as before. This ergonomic design can be disengaged by simply pinching the locking mechanism on each side of the plug.

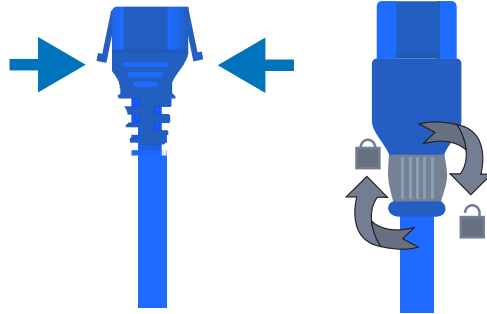

The newly designed dual lock connector provides universal locking with a clean and functional twist locking mechanism engineered into the cord grip body. Perfect for any installation.

Fit: Server Tech, Raritan, Emerson Vertiv PDUs

Fit: Universal

HOW IT WORKS

SPECIFICATIONS	DESCRIPTION
STANDARD	IEC 60320
HIGH TEST VOLTAGE	2000VAC (1MIN 50Hz) 500VDC (1MIN)
RATING	UL/cUL: 15A 250VAC TUV or VDE: 10A 250VAC
OPERATIONAL TEMP	-25°C~ 70°C
FLAMABILITY	PLUG/CONNECTOR: UL 94-V CABLE: UL VW-1, IEC60332-1. CAT F2
CONDUCTOR SIZE	NORTH AMERICA: 14AWG EUROPE: 1.5MM2

ORDERING

DUAL LOCK CONFIGURATION



DL1419 - X - XXX - XXX

WIRE	CLASSIFICATION
1.5MM2 H05VV-F	02
14AWG/SJT	H

LENGTH (INCHES)
*lengths in FT are stocked

*BLACK IS STANDARD

GRY
BLU
PUR
GRN
ORG
RED
YEL
WHT

