




The Plug Locking Mechanism is the same robust style as before. This ergonomic design can be disengaged by simply pinching the locking mechanism on each side of the plug.

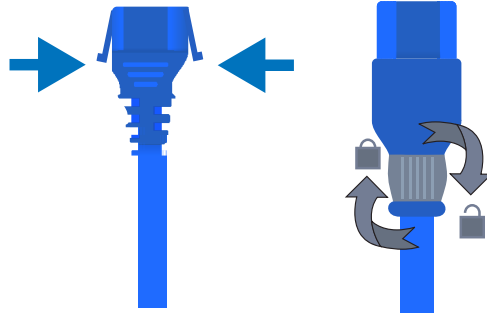

Fit: Server Tech, Raritan, Emerson Vertiv PDUs

The newly designed dual lock connector provides universal locking with a clean and functional twist locking mechanism engineered into the cord grip body. Perfect for any installation.

Fit: Universal

HOW IT WORKS

SPECIFICATIONS	DESCRIPTION
STANDARD	IEC 60320
HIGH TEST VOLTAGE	2000VAC (1MIN 50Hz) 500VDC (1MIN)
RATING	UL/cUL: 15A/20A 250VAC TUV or VDE: 16A 250VAC
OPERATIONAL TEMP	-25°C~ 70°C
FLAMABILITY	PLUG/CONNECTOR: UL 94-V CABLE: UL VW-1, IEC60332-1. CAT F2
CONDUCTOR SIZE	NORTH AMERICA: 14AWG/12AWG EUROPE: 1.5MM2/2.5MM2

ORDERING

DUAL LOCK CONFIGURATION



DL1419 - X - XXX - XXX

WIRE	CLASSIFICATION
1.5MM2 H05VV-F	02
2.5MM2 H05VV-F	03
12AWG/SJT	J
14AWG/SJT	H

LENGTH (INCHES)
*lengths in FT are stocked

*BLACK IS STANDARD

