




The Plug Locking Mechanism is the same robust style as before. This ergonomic design can be disengaged by simply pinching the locking mechanism on each side of the plug.

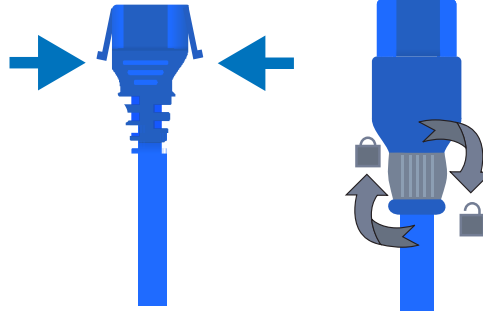

Fit: Server Tech, Raritan, Emerson Vertiv PDUs

The newly designed dual lock connector provides universal locking with a clean and functional twist locking mechanism engineered into the cord grip body. Perfect for any installation.

Fit: Universal

HOW IT WORKS

SPECIFICATIONS	DESCRIPTION
STANDARD	IEC 60320
HIGH TEST VOLTAGE	2000VAC (1MIN 50Hz) 500VDC (1MIN)
RATING	UL/cUL: 10A/13A/15A 250VAC TUV or VDE: 10A 250VAC
OPERATIONAL TEMP	-25°C~ 70°C
FLAMABILITY	PLUG/CONNECTOR: UL 94-V CABLE: UL VW-1, IEC60332-1. CAT F2
CONDUCTOR SIZE	NORTH AMERICA: 18AWG/16AWG/14AWG EUROPE: 0.75MM2/1.0MM2

ORDERING

DUAL LOCK CONFIGURATION



DL1415 - X - XXX - XXX

WIRE	CLASSIFICATION
18AWG/SVT	SVT
18AWG/SJT	F
16AWG/SJT	G
14AWG/SJT	H
0.75MM2 H05VV-F	00
1.00MM2 H05VV-F	01

LENGTH (INCHES)
*lengths in FT are stocked

*BLACK IS STANDARD

- GRY
- BLU
- PUR
- GRN
- ORG
- RED
- YEL
- WHT

