


|                |   |
|----------------|---|
| STANDARDS      | IEC 60320 <input checked="" type="checkbox"/>                                   |
| APPROVALS      | C-UL <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/> |
| CERTIFICATIONS | ROHS <input checked="" type="checkbox"/>  |

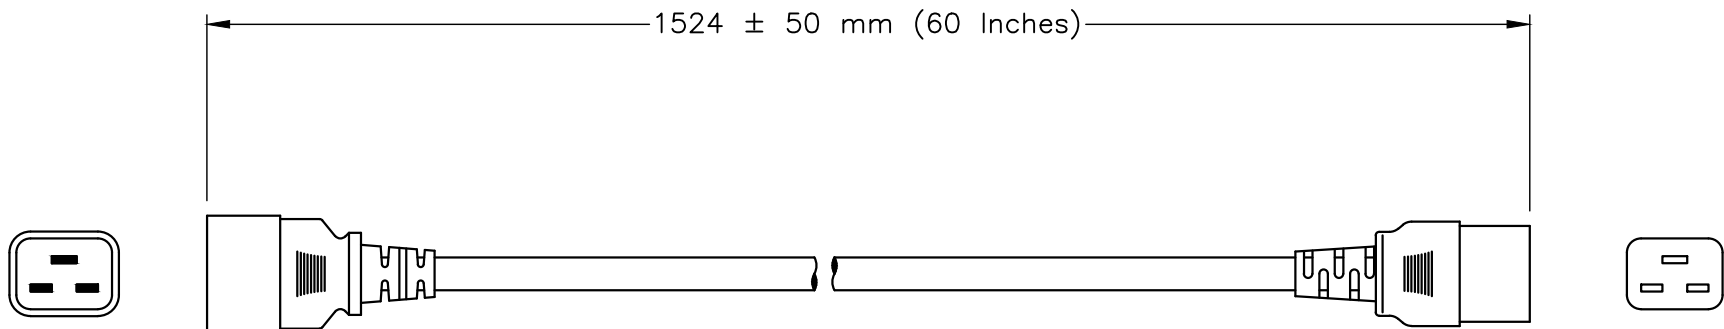

IEC 60320, C20  
(ROTATED 90°)

IEC 60320, C19  
(ROTATED 90°)

**SPECIFICATIONS:**

1. OVERALL LENGTH: 1524 ± 50 mm (60 INCHES)
2. CONDUCTORS: 12awg-3c
3. JACKET: SJT(OW), 105°C, WHITE
4. PLUG: IEC 60320 C20, STRAIGHT, WHITE
5. CONNECTOR: IEC 60320 C19, STRAIGHT, WHITE
6. RATED: 20A 250V
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.8 LBS / 0.36 Kg
9. MISCELLANEOUS:

|  |   |                         |     |
|--|---|-------------------------|-----|
| <b>WORLD CORD SETS, INC.</b>               |   |                         |     |
| TEL (860)763-2100                          |  | www.WorldCordSets.com   |     |
| FAX (860)763-1183                          |   | sales@WorldCordSets.com |     |
| TITLE                                      |   |                         |     |
| IEC 60320 C20 to C19 DETACHABLE POWER CORD |   |                         |     |
| SCALE                                      | DATE  | PART NO.                | REV |
| NONE                                       | 12-06-2012  | 2019-J-060-WHT          | -   |

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.