
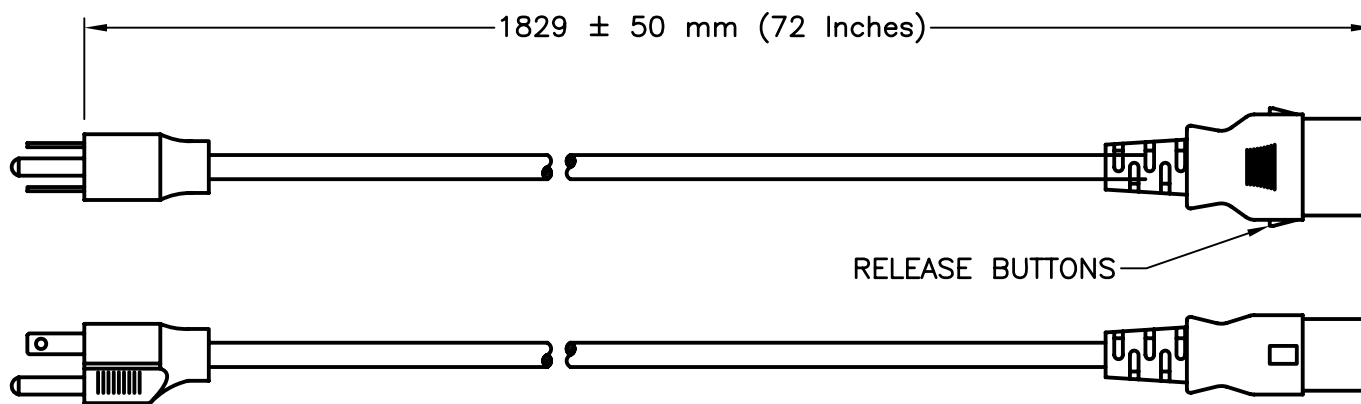
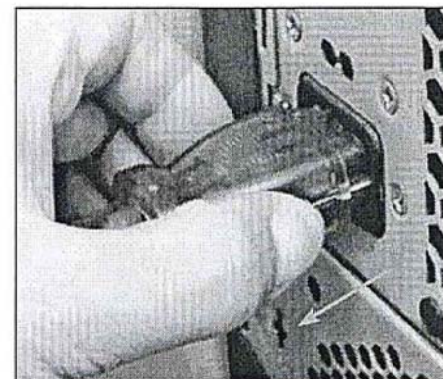


STANDARDS	IEC 60320 <input checked="" type="checkbox"/> NEMA 5-15P <input checked="" type="checkbox"/>
APPROVALS	UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

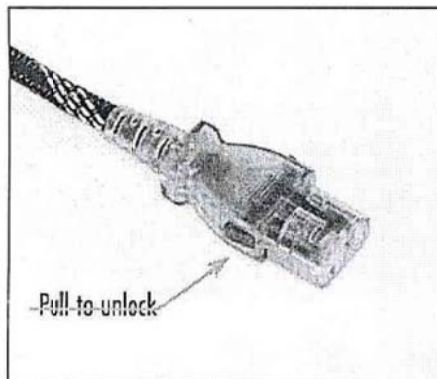

NEMA 5-15P

IEC 60320, C19  
LOCKING

**SPECIFICATIONS:**

1. OVERALL LENGTH: 1829 ± 50 mm (72 INCHES)
2. CONDUCTORS: 14awg-3c
3. JACKET: SJT WHITE
4. PLUG: NEMA 5-15P, STRAIGHT, WHITE
5. CONNECTOR: IEC 60320 C19 LOCKING, STRAIGHT, BLACK
6. RATED: 15 AMPERE 125 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.7 LBS / 0.32 Kg
9. MISCELLANEOUS:

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE

NEMA 5-15P to C19 LOCKING

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE  
NONE

DATE  
06-14-2013

PART NO.  
51519K-H-072-WHT

REV  
—