

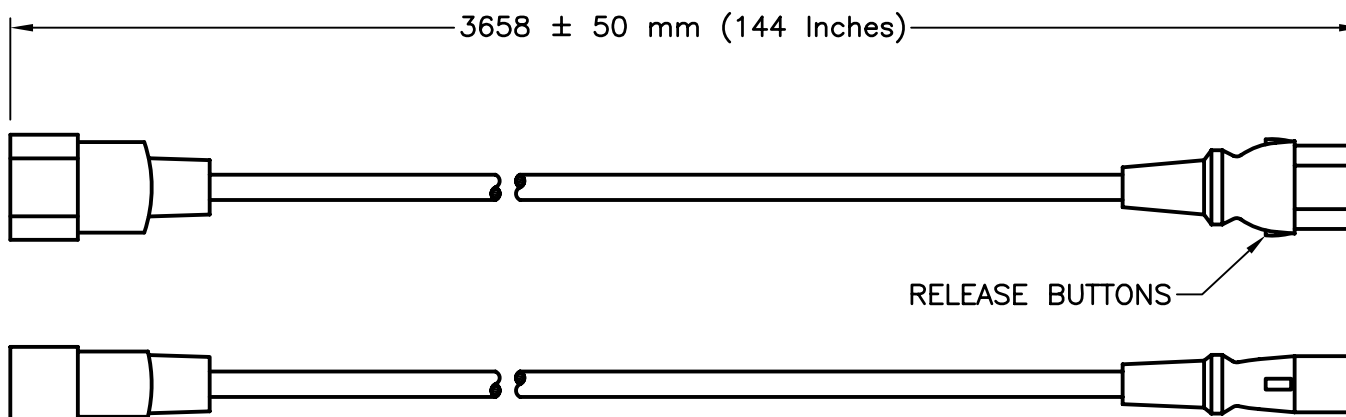
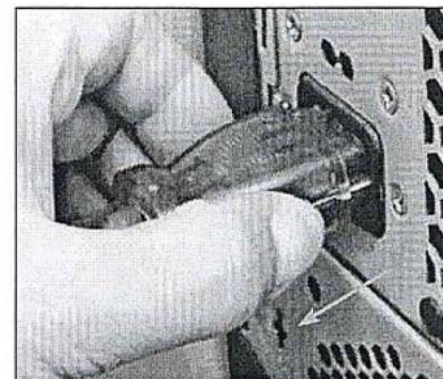


STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

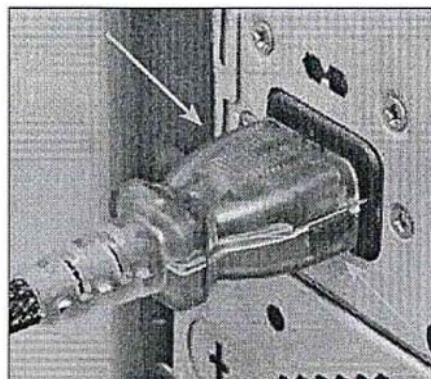

IEC 60320, C14

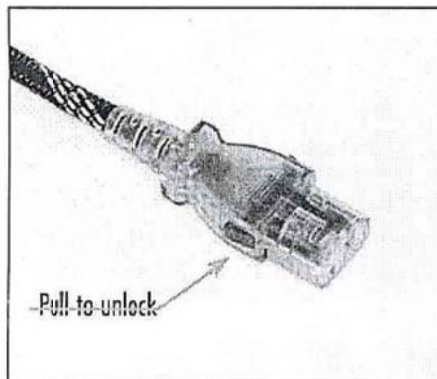

IEC 60320, C13  
LOCKING

**SPECIFICATIONS:**

1. OVERALL LENGTH: 3658 ± 50 mm (144 INCHES)
2. CONDUCTORS: 14awg-3c
3. JACKET: SJT WHITE
4. PLUG: IEC 60320 C14, STRAIGHT, WHITE
5. CONNECTOR: IEC 60320 C13 LOCKING, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 1.25 LBS / 0.57 Kg
9. MISCELLANEOUS:

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE

C14 to C13 LOCKING

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE  
NONE

DATE  
06-14-2013

PART NO.  
1413K-H-144-WHT

REV  
—