


STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	CSA <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/> VDE <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

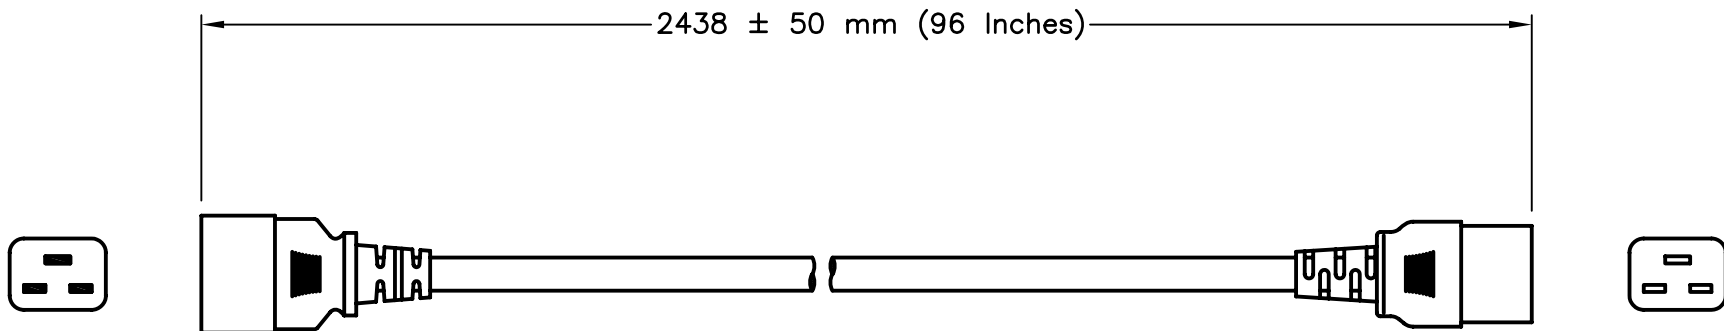


IEC 60320, C20  
(ROTATED 90°)

IEC 60320, C19  
(ROTATED 90°)

**SPECIFICATIONS:**

1. OVERALL LENGTH: 2438 ± 50 mm (96 INCHES)
2. CONDUCTORS: 14/3 (3x1.5mm<sup>2</sup>), CEE COLOR CODE
3. JACKET: SJTO (H05VV-F), 105°C, BLACK
4. PLUG: IEC 60320 C20, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C19, STRAIGHT, BLACK
6. RATED: 250V – 15A (NORTH AMERICA), 16A (EUROPE)
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.95 LBS / 0.43 Kg
9. MISCELLANEOUS:

<b>WORLD CORD SETS, INC.</b>			
TEL (860)763-2100		www.WorldCordSets.com	
FAX (860)763-1183		sales@WorldCordSets.com	
TITLE			
CUSTOM CORDSET			
SCALE	DATE	PART NO.	REV
NONE	05-06-2010	2019-C-096	—

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.