


STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	CSA <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/> VDE <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

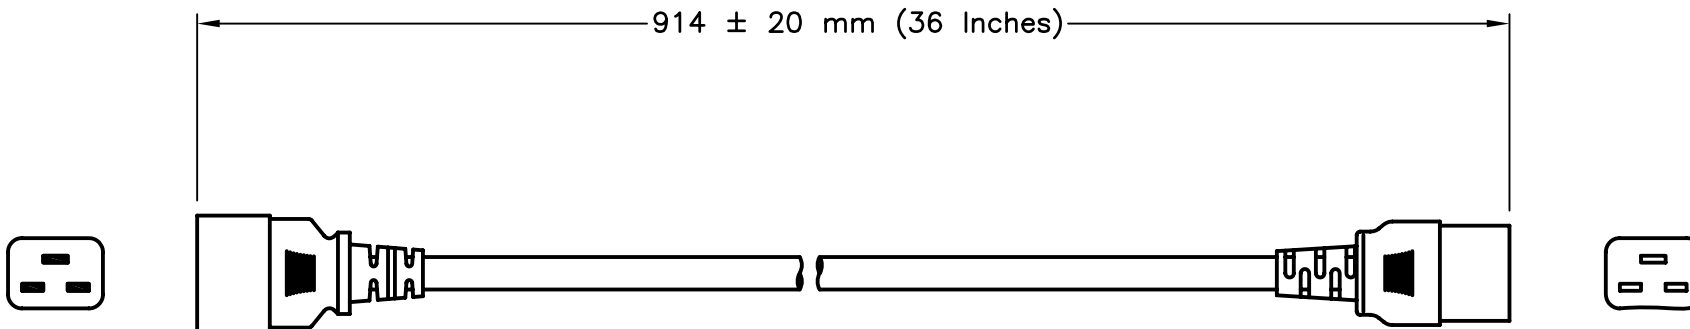

IEC 60320, C20  
(ROTATED 90°)

IEC 60320, C19  
(ROTATED 90°)

**SPECIFICATIONS:**

1. OVERALL LENGTH: 914 ± 20 mm (36 INCHES)
2. CONDUCTORS: 14/3 (3x1.5mm<sup>2</sup>), CEE COLOR CODE
3. JACKET: SJTO (H05VV-F), 105°C, BLACK
4. PLUG: IEC 60320 C20, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C19, STRAIGHT, BLACK
6. RATED: 250V – 15A (NORTH AMERICA), 16A (EUROPE)
7. PUT-UP: BULK PACKED
8. WEIGHT (APPROX): 0.44 LBS / 0.20 Kg
9. MISCELLANEOUS:

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE

CUSTOM CORDSET

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS.  
NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE  
NONE

DATE  
08-12-2009

PART NO.  
2019-C-036

REV  
—