


NOTES:

1. Terminal, Screw Torque (Nm)
  - Maximum: 20
  - Minimum: 15
  - Average: 18
2. Cover, Screw Torques (Nm)
  - Maximum: 15
  - Minimum: 10

Description	User Attachable RCD, Plug-Head Style
Plug Configuration	SCHUKO CEE 7/7
Rated Current	16 amps
Rated Voltage	220-240 Volts
Frequency	50 Hz
Polarity	2 Pole 3 Wire
Tripping Current	15 to 30 mA (maximum)
Maximum Tripping Time	30 ms
Ambient Temperature Range	-25C to 40C
Reset Type upon Power Loss	Manual (also known as Active or non-Latching)
Color	Black
Design	GS Approval, CE, Tested by Intertek, Type A Protection grade for housing: IP54 Tested according to DIN VDE 0620-1:2005
Cordage	Accepts 6.2 - 11 mm diameter cordage
Grommet	included
RoHS	RoHS compliant
Function	Test and Reset Buttons not to be used as ON/OFF switch

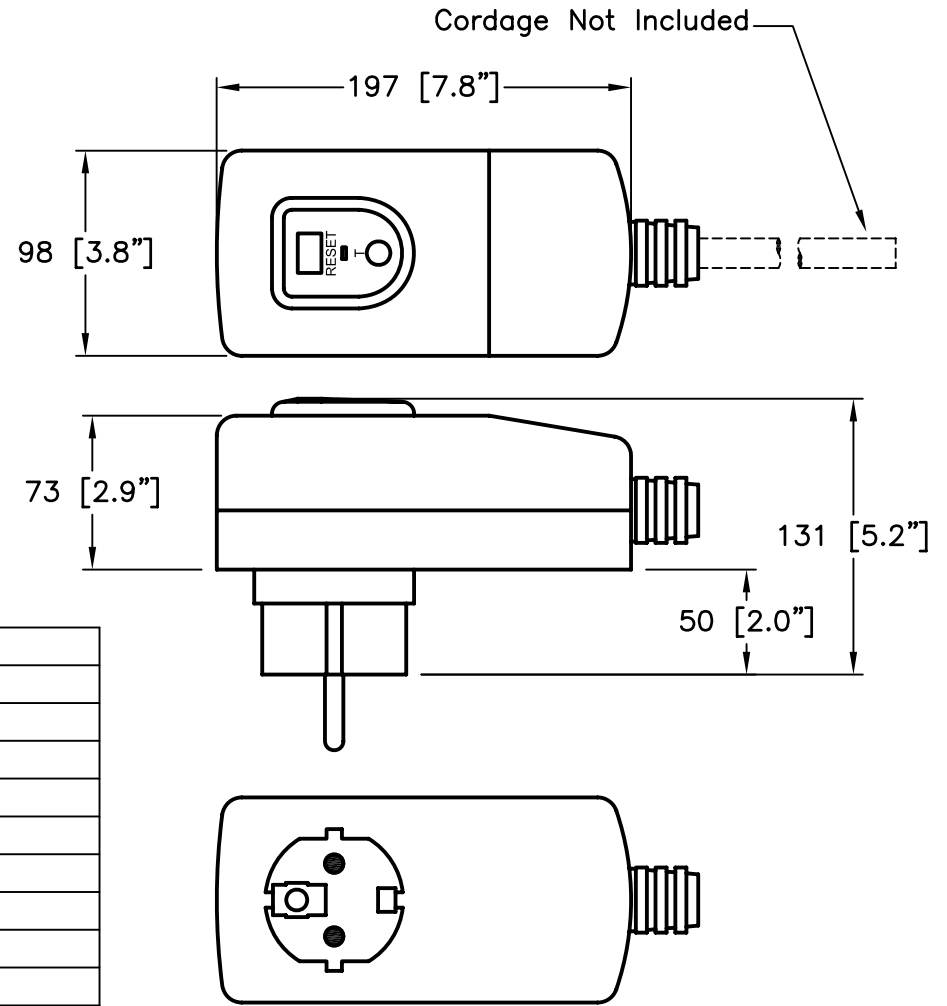

ALL DIMENSIONS ARE IN MILLIMETERS

**WORLD CORD SETS, INC.**

TEL (860)763-2100            www.WorldCordSets.com  
 FAX (860)763-1183      sales@WorldCordSets.com

TITLE  
**RCD – USER ATTACHABLE, PLUG-HEAD STYLE**

SCALE NONE	DATE 12-3-2007	PART NO. RPH-M-SCHUKO-30B	REV D
---------------	-------------------	------------------------------	----------