


STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

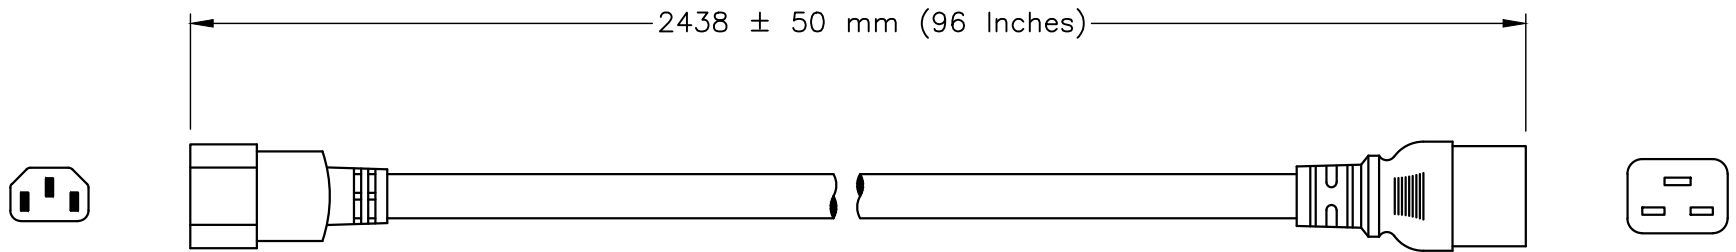


IEC 60320, C14
(ROTATED 90°)

IEC 60320, C19
(ROTATED 90°)

SPECIFICATIONS:

1. OVERALL LENGTH: 2438 ± 50 mm (96 INCHES)
2. CONDUCTORS: 14 AWG x 3, NACC
3. JACKET: SJTOW, 105°C, GREEN
4. PLUG: IEC 60320 C14, STRAIGHT, GREEN
5. CONNECTOR: IEC 60320 C19, STRAIGHT, GREEN
6. RATED: 15 AMPERE 250 VOLT
7. PUT-UP: BULK PACKED
8. WEIGHT (APPROX): 0.90 LBS / 0.41 Kg
9. MISCELLANEOUS:

WORLD CORD SETS, INC.			
TEL (860)763-2100		www.WorldCordSets.com	
FAX (860)763-1183		sales@WorldCordSets.com	
TITLE			
C14 C19 DETACHABLE POWER CORD			
SCALE	DATE	PART NO.	REV
NONE	07-15-2010	1419-H-096-GRN	-