



STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	CSA <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

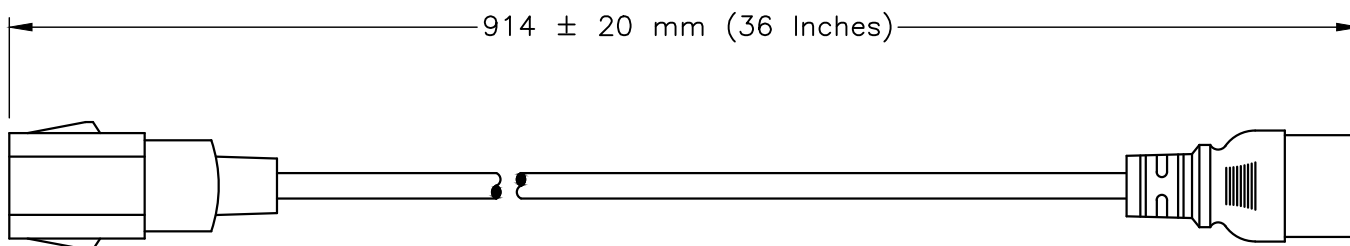

IEC 60320  
LOCKING C14



IEC 60320, C19

SPECIFICATIONS:

- |                     |  |
|---------------------|--|
| 1. OVERALL LENGTH:  | 3 FEET                                 |
| 2. CONDUCTORS:      | 14awg-3c                               |
| 3. JACKET:          | SJT, BLACK                             |
| 4. PLUG:            | IEC 60320 C14 LOCKING, STRAIGHT, BLACK |
| 5. CONNECTOR:       | IEC 60320 C19, STRAIGHT, BLACK         |
| 6. RATED:           | 15 AMPERE 250 VOLT                     |
| 7. PUT-UP:          | COILED                                 |
| 8. WEIGHT (APPROX): | 0.41 LBS / 0.19 Kg                     |
| 9. MISCELLANEOUS:   |  |

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE  
LOCKING C-14 TO C-19 15A 250V POWER CORD

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE NONE	DATE 05-14-2018	PART NO. <b>14K19-H-036</b>	REV —
---------------	--------------------	--------------------------------	----------