



APPROVALS	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>
CERTIFICATIONS	CE <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	
STANDARDS	IEC 60320 <input checked="" type="checkbox"/>		

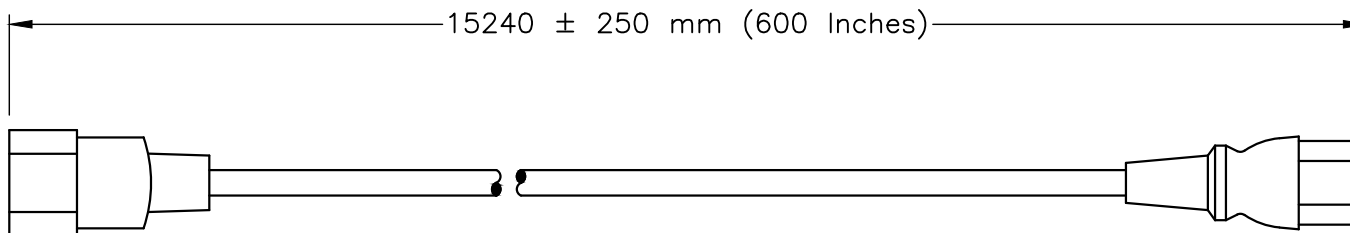

IEC 60320, C14



IEC 60320, C13

**SPECIFICATIONS:**

1. OVERALL LENGTH: 15240 ± 250 mm (600 INCHES)
2. CONDUCTORS: 18 AWG x 3 (3x1.0mm<sup>2</sup>)
3. JACKET: SJTOW (H05VV-F), 105°C, BLACK
4. PLUG: IEC 60320 C14, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C13, STRAIGHT, BLACK
6. RATED: 10 AMPERE 250 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 2.65 LBS / 1.20 Kg
9. MISCELLANEOUS:

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE  
UNIVERSAL C14 C13 DETACHABLE POWER CORD

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE NONE	DATE 08-12-2009	PART NO. <b>1413-A-600</b>	REV -
---------------	--------------------	-------------------------------	----------