



Description	User Attachable GFCI, Plug-Head Style
Plug Configuration	Nema 5-15p
Rated Current	10 amps
Rated Supply Voltage	120 Volts +10/-15%
Frequency	60 Hz
Polarity	2 Pole 3 Wire
Tripping Current	4-6 mA
Maximum Tripping Time	25 ms
Ambient Temperature Range	-35C to 66C
Reset Type upon Power Loss	Manual (also known as Active or non-Latching)
Color	Black
Design	UL Standard 943 Class A, CUL C22.2 compliant UL / CUL Listed Rainproof Design
Cordage	Accepts 18/3 SJT(W)
Grommet	included
Function	Test and Reset Buttons not to be used as ON/OFF switch

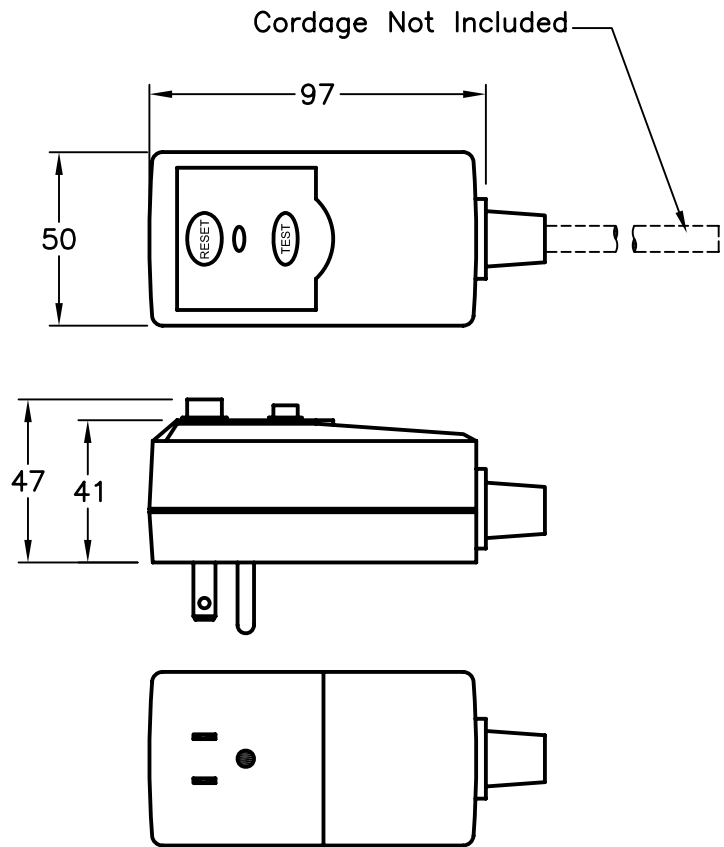

ALL DIMENSIONS ARE IN MILLIMETERS

WORLD CORD SETS, INC.			
TEL (860)763-2100			www.WorldCordSets.com
FAX (860)763-1183			sales@WorldCordSets.com
TITLE			
GFCI – USER ATTACHABLE, PLUG–HEAD STYLE			
SCALE	DATE	PART NO.	REV
NONE	12-3-2007	PH-M-10125	—