

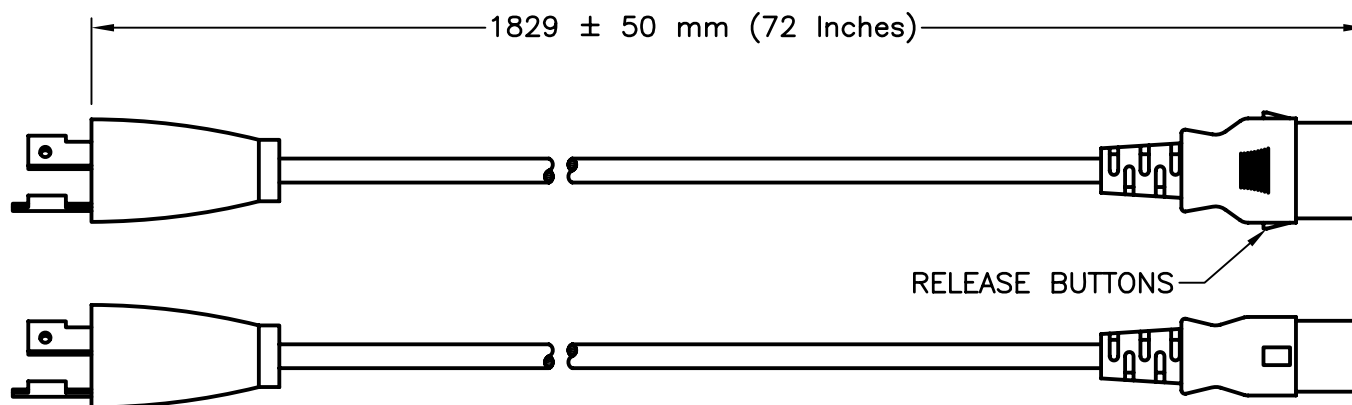
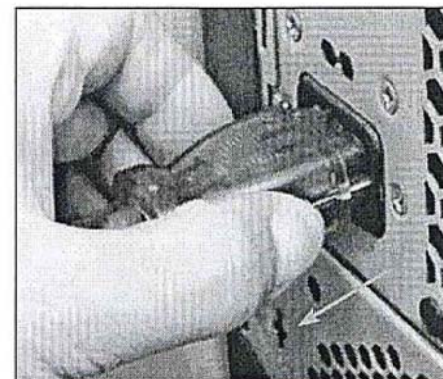


STANDARDS	IEC 60320 <input checked="" type="checkbox"/> NEMA L6-20P <input checked="" type="checkbox"/>
APPROVALS	UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

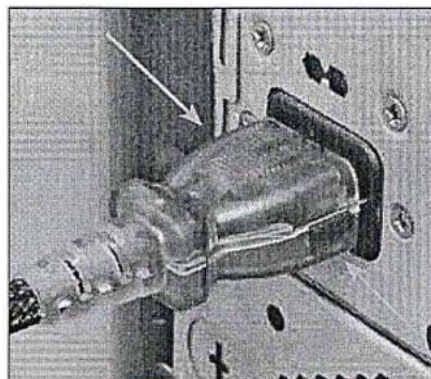

NEMA L6-20P

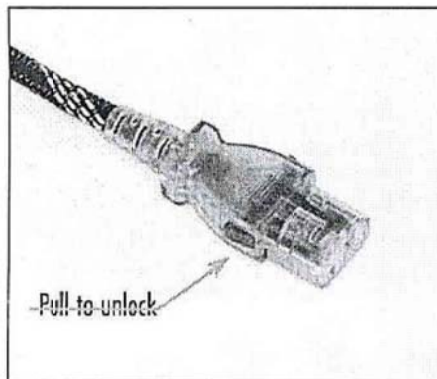

IEC 60320, C19  
LOCKING

**SPECIFICATIONS:**

1. OVERALL LENGTH: 1829 ± 50 mm (72 INCHES)
2. CONDUCTORS: 14awg-3c
3. JACKET: SJT BLACK
4. PLUG: NEMA L6-20P, LOCKING, BLACK
5. CONNECTOR: IEC 60320 C19 LOCKING, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.8 LBS / 0.36 Kg
9. MISCELLANEOUS:

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE

NEMA L6-20P to C19 LOCKING

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE  
NONE

DATE  
06-14-2013

PART NO.  
L62019K-H-072

REV  
—