
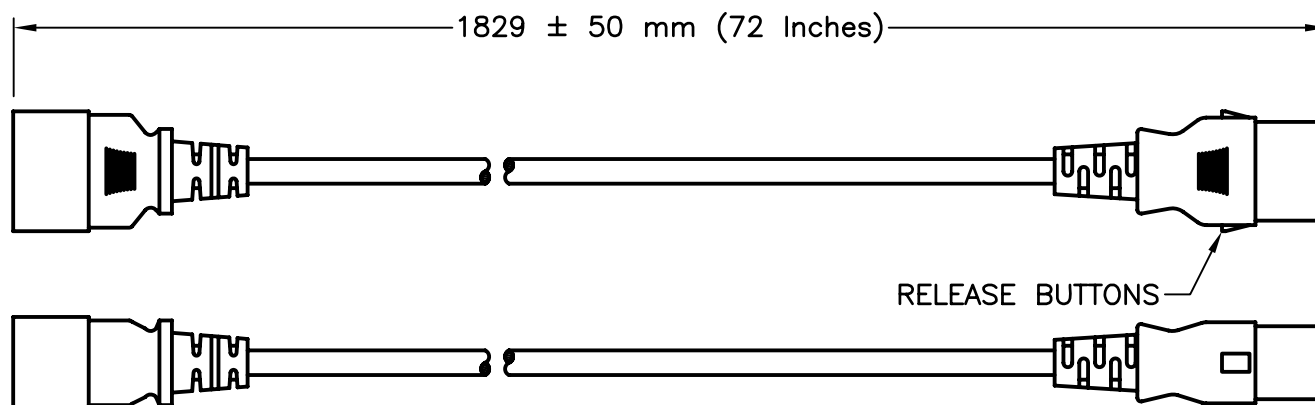
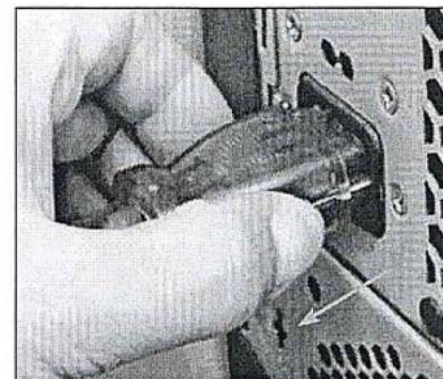
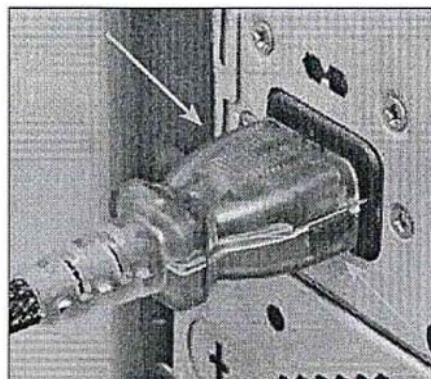


STANDARDS	IEC 60320 <input checked="" type="checkbox"/>
APPROVALS	UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>

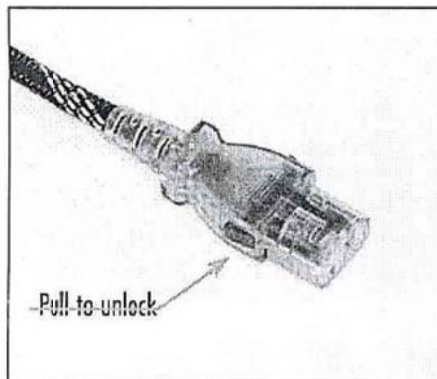

IEC 60320, C20

IEC 60320, C19  
LOCKING

**SPECIFICATIONS:**

1. OVERALL LENGTH: 1829 ± 50 mm (72 INCHES)
2. CONDUCTORS: 14awg-3c
3. JACKET: SJT BLACK
4. PLUG: IEC 60320 C20, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C19 LOCKING, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.75 LBS / 0.34 Kg
9. MISCELLANEOUS:

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE  
C20 to C19 LOCKING

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE NONE	DATE 06-14-2013	PART NO. 2019K-H-072	REV —
---------------	--------------------	-------------------------	----------