



Description	User Attachable GFCI, Plug-Head Style
Plug Configuration	Nema 5-15p
Rated Current	15 amps
Rated Supply Voltage	120 Volts +10/-15%
Frequency	60 Hz
Polarity	2 Pole 3 Wire
Tripping Current	4-6 mA
Maximum Tripping Time	25 ms
Ambient Temperature Range	-35C to 66C
Reset Type upon Power Loss	Manual (also known as Active or non-Latching)
Color	Black
Design	UL Standard 943 Class A, CUL C22.2 compliant UL / CUL Listed Rainproof Design
Cordage	Accepts 14/3 or 12/3 SJT(W)
Grommet	must specify cordage in order to match grommet
Function	Test and Reset Buttons not to be used as ON/OFF switch

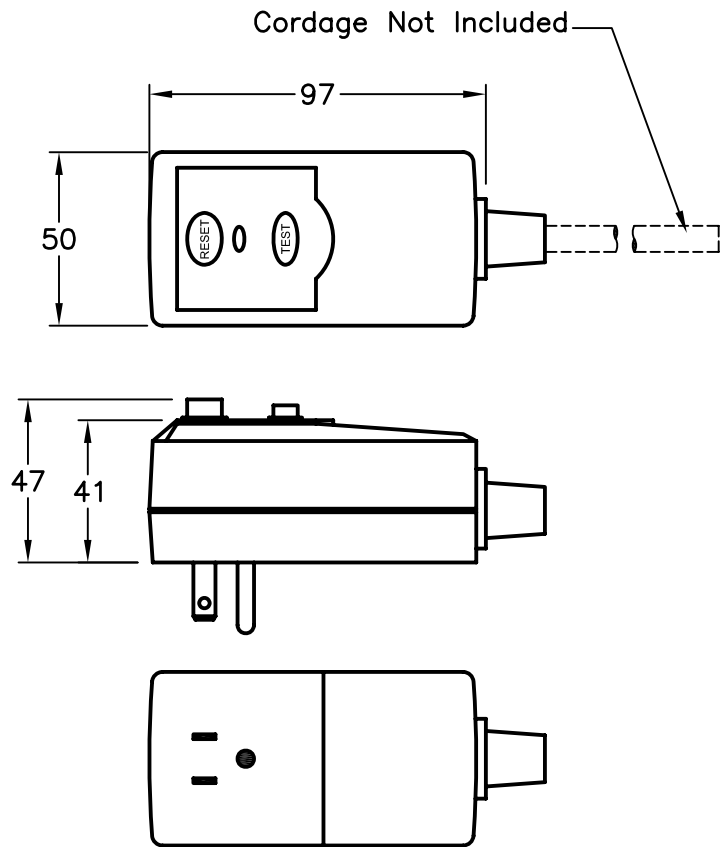

ALL DIMENSIONS ARE IN MILLIMETERS

WORLD CORD SETS, INC.			
TEL (860)763-2100		www.WorldCordSets.com	
FAX (860)763-1183		sales@WorldCordSets.com	
TITLE			
GFCI – USER ATTACHABLE, PLUG–HEAD STYLE			
SCALE	DATE	PART NO.	REV
NONE	12-3-2007	PH-M-15125	—