


|                |                                                                                 |
|----------------|---------------------------------------------------------------------------------|
| STANDARDS      | IEC 60320 <input checked="" type="checkbox"/>                                   |
| APPROVALS      | C-UL <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/> |
| CERTIFICATIONS | ROHS <input checked="" type="checkbox"/>                                        |

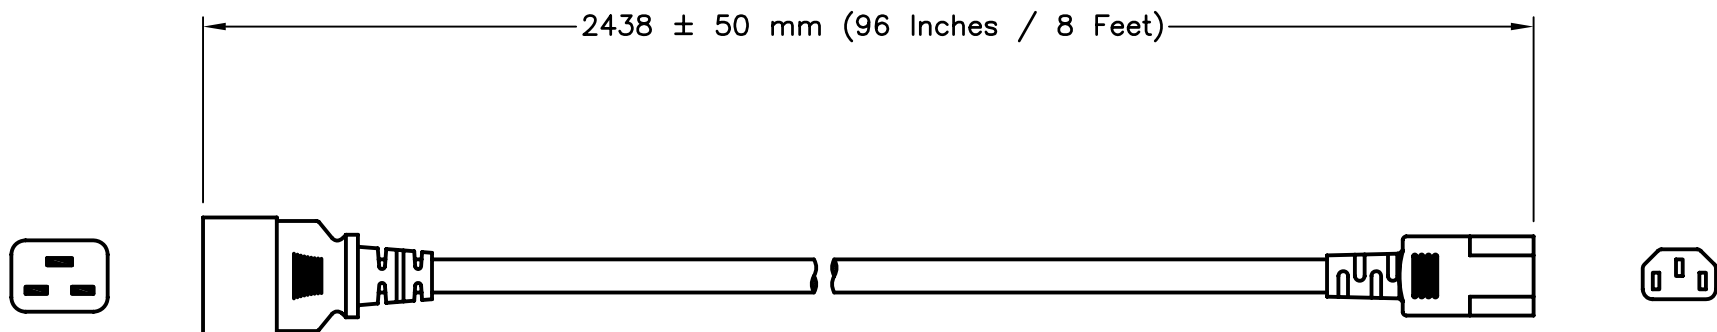

IEC 60320, C20  
(ROTATED 90°)

IEC 60320, C13  
(ROTATED 90°)

#### SPECIFICATIONS:

1. OVERALL LENGTH: 2438 ± 50 mm (96 INCHES / 8 FEET)
2. CONDUCTORS: 14/3
3. JACKET: SJT, 105°C, BLACK
4. PLUG: IEC 60320 C20, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C13, STRAIGHT, BLACK
6. RATED: 250V 15A
7. PUT-UP: COILED
8. WEIGHT (APPROX): 0.90 LBS / 0.41 Kg
9. MISCELLANEOUS:

#### **WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



[www.WorldCordSets.com](http://www.WorldCordSets.com)  
[sales@WorldCordSets.com](mailto:sales@WorldCordSets.com)

TITLE

CUSTOM CORDSET

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS.  
NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE  
NONE

DATE  
07-01-2010

PART NO.  
2013-H-096

REV  
—