
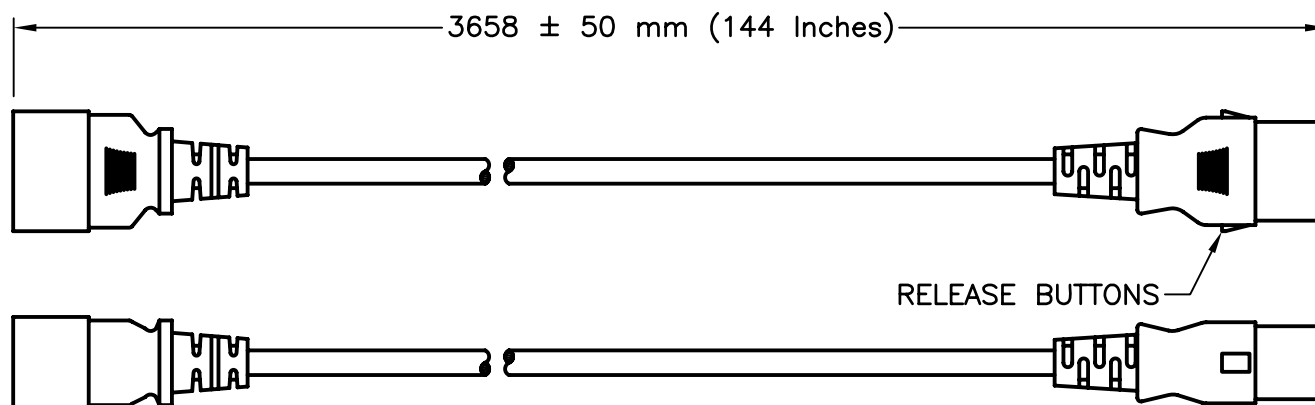
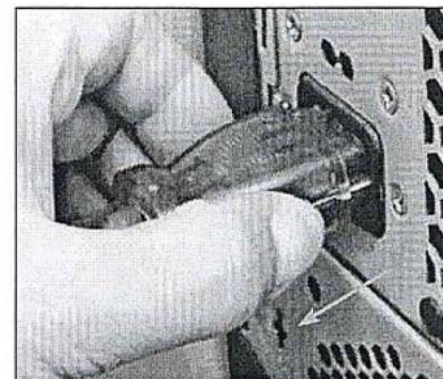
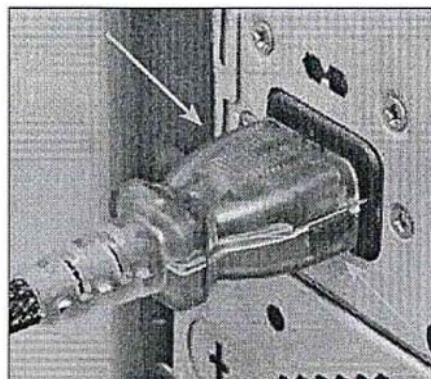


| | |
|----------------|---|
| STANDARDS | IEC 60320 <input checked="" type="checkbox"/> |
| APPROVALS | UL <input checked="" type="checkbox"/> C-UL <input checked="" type="checkbox"/> |
| CERTIFICATIONS | ROHS <input checked="" type="checkbox"/> |

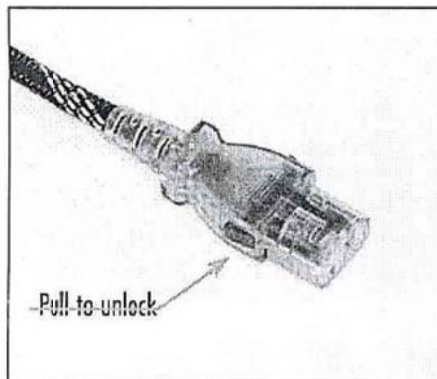

IEC 60320, C20

IEC 60320, C19
LOCKING

SPECIFICATIONS:

1. OVERALL LENGTH: 3658 ± 50 mm (144 INCHES)
2. CONDUCTORS: 14awg-3c
3. JACKET: SJT WHITE
4. PLUG: IEC 60320 C20, STRAIGHT, WHITE
5. CONNECTOR: IEC 60320 C19 LOCKING, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT
7. PUT-UP: COILED
8. WEIGHT (APPROX): 1.35 LBS / 0.61 Kg
9. MISCELLANEOUS:

WORLD CORD SETS, INC.

TEL (860)763-2100
FAX (860)763-1183



www.WorldCordSets.com
sales@WorldCordSets.com

TITLE
C20 to C19 LOCKING

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

| | | | |
|---------------|--------------------|-----------------------------|----------|
| SCALE NONE | DATE 06-14-2013 | PART NO. 2019K-H-144-WHT | REV — |
|---------------|--------------------|-----------------------------|----------|